608

PROPOSED SEWAGE SYSTEM
FOR
STORAGE BUILDING
SEABROOK, N. H.
H.E. BLANCHARD & SONS
CONTRACTOR, NEWINGTON

NOV. 1969

R.K. PARKER JR LAND SURVEYING WASHINGTON ST. SEABROOK, N.H.

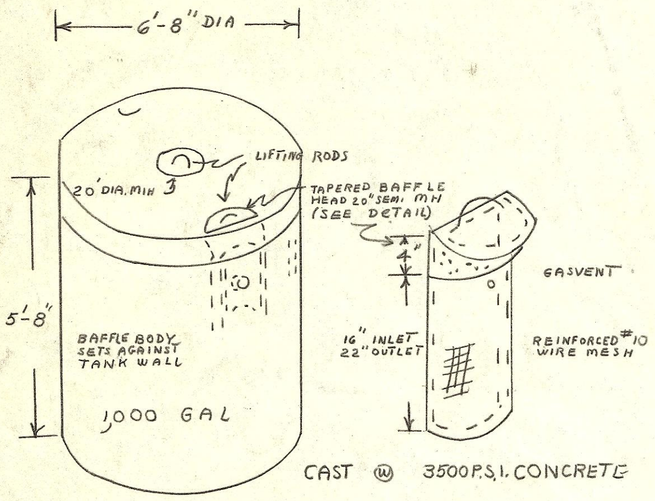

TANK & BAFFLE DETAIL

BOTTOM OF TANK
TO CENTER INLET 5'-0"
" " OUTLET 4'-10"

HEIGHT INSIDE	DIA INSIDE	DIST. INSIDE	CAPACITY LIQUID CHAMBER	SOLIDS
4'-10"	5'-10"	3'-10"	758 GAL.	198

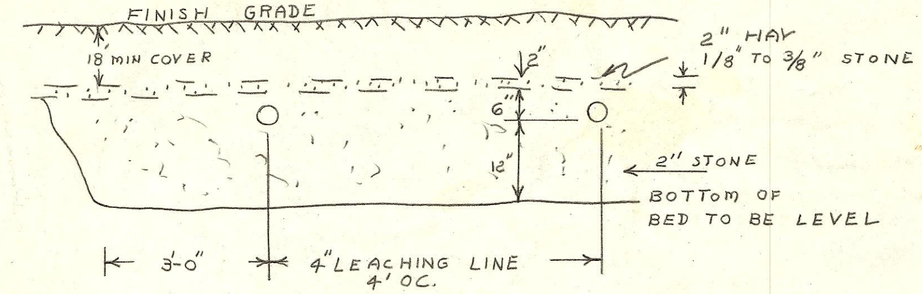

PARTIAL SECTION OF LEACH FIELD

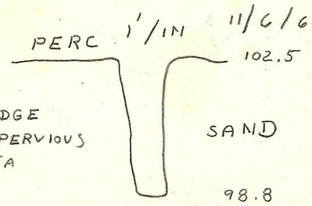

STONE SHALL BE WASHED CRUSHED STONE OR WASHED GRAVEL FREE FROM IRON, FINES, DUST & ORGANIC MATTER AS LAID

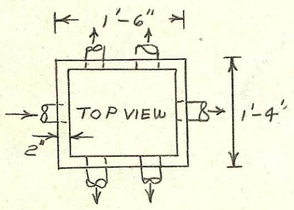

"USE"

RILA PRECAST CONCRETE PRODUCTS

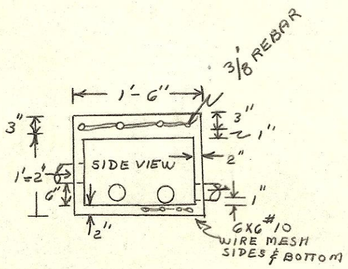

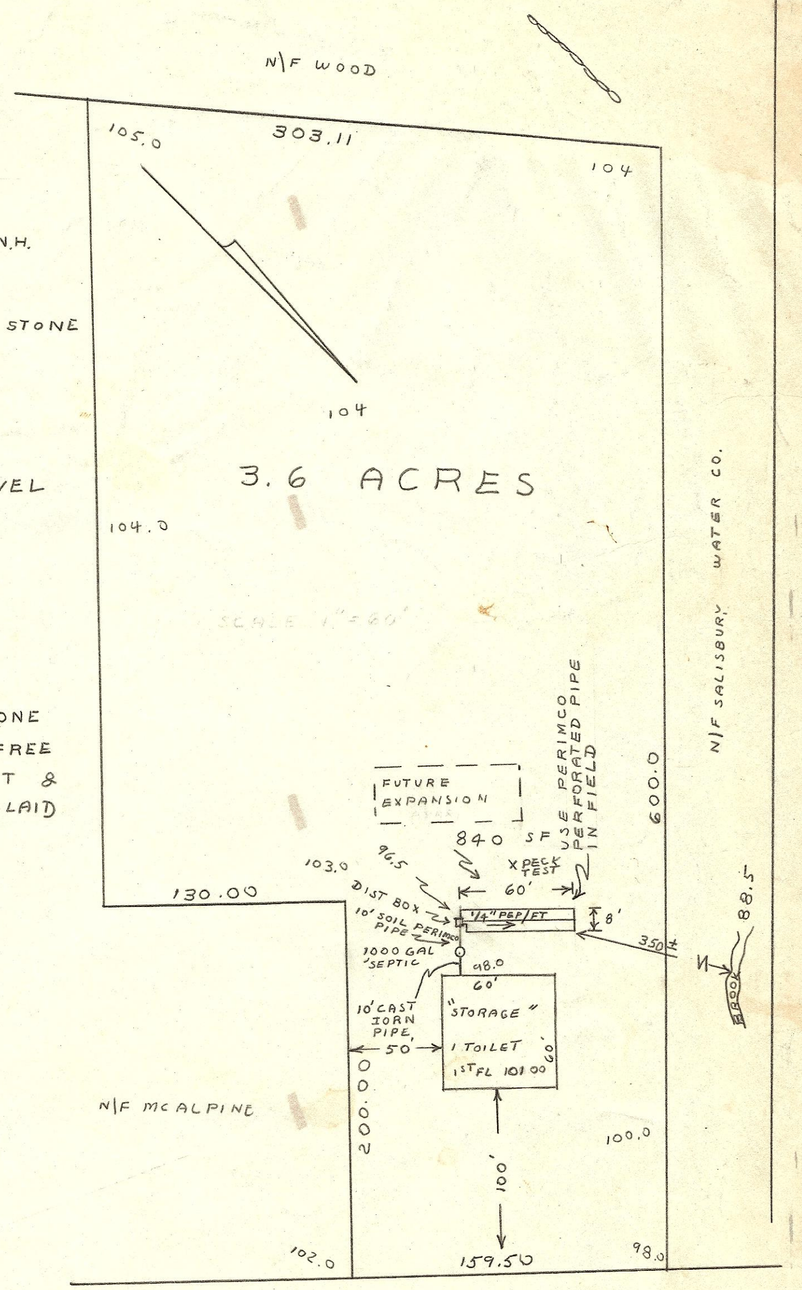

"NOTE"
SEE EBBTIDE PLAN
APPROVED 6/21/68 BY
WATER SUPPLY & POLLUTION COMM

608